
GM-LOC1

INSTALLATION GUIDE

Thank you for your purchase!

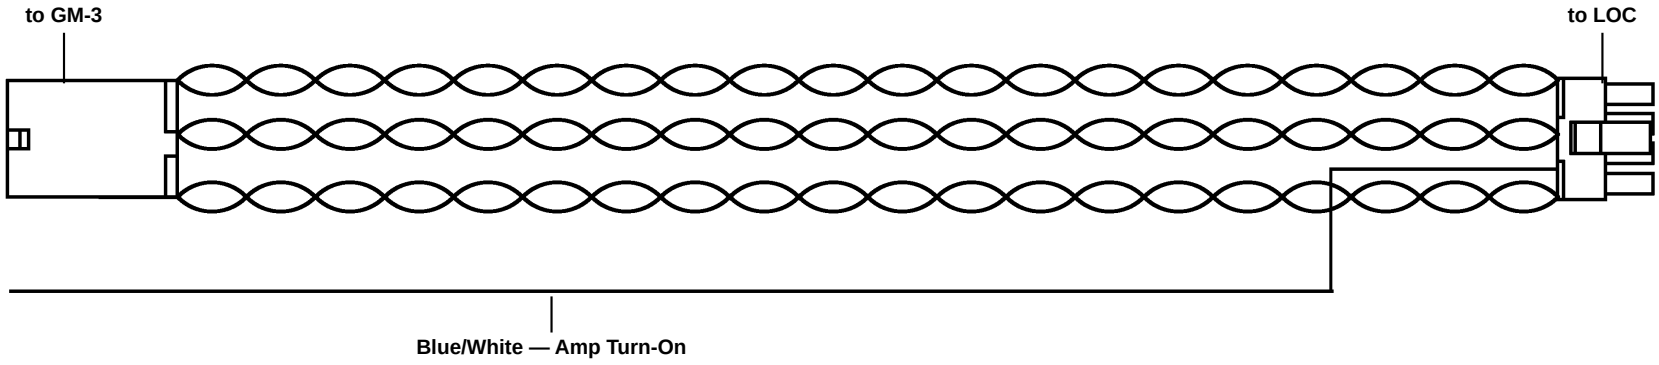

1. Plug the **female 8-pin** into the **GM-3** harness.

2. Plug the **male 8-pin** into the included **LOC**.

3. The **blue/white wire** is an **amp turn-on output** — connect directly to your sub amp's **remote turn-on**.

4. The LOC has **two RCA outputs** (low-level) — connect to your sub amp's **RCA input**.